
# -25 °C Biomedical Freezer





### **FEATURERS**

**MDF-25V358** 

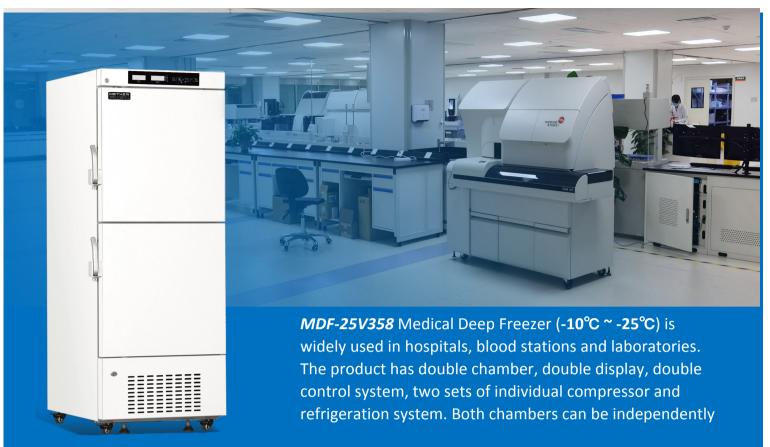

# Imported brand compressors

Double cooling system, double chamber



#### **Fast pull down** Rapid cooling from +25°C to -25°C



#### **Coil evaporator** Better performance, easy maintenance




 $\bigcirc$ 

#### **USB interface** 10-year data for downloading

### Lockable doors

Standard locks & padlocks



Jun .

**\$** 

Precise temp. control Temp. control accurate to 0.1°C

Easy to observe and operate, built-in USB




**6 types of alarm** Audible and visual alarms


Large LED displays




Variable space Adjustable shelves and drawers

**Eco-friendly** CFC-free refrigerant and energy-saving





# STRUCTURE

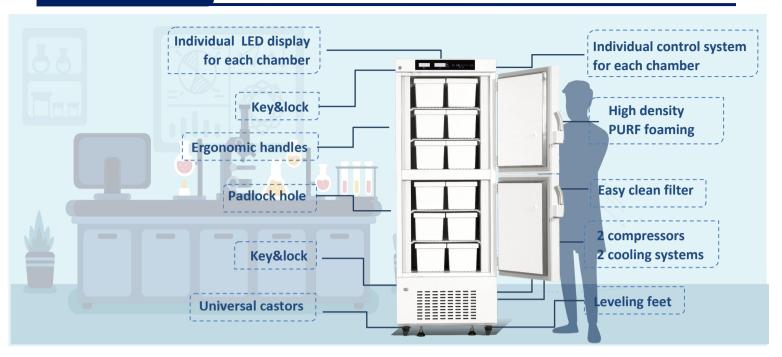



### PARAMETER

Performance		Refrigeration System		Alarms	
Cooling method	Direct cooling	Compressor brand/QTY	CUBIGEL/2	High/low temperature	Y
Defrost	Manual	Condenser	Copper tube	Power failure	Y
Refrigerant	R290	Temp. controller	Microprocessor	Sensor error	Y
Temperature range	-10℃~-25℃	Sensor	NTC	Controller failure	Y
Ambient temperature	10~32°C	Display	Digital display	Door a jar	Y

Electrical Data		Dimensions		Other	
Voltage frequency(	220V 50Hz/110V 60	OHZ Capacity (L/cu.ft)	358/12.6	USB port	Y
Power (W)	310W	Interior size(W*D*H)(mm)	(466*636*625)*2	Remote alarm port	Y
Current (A)	3A	Exterior size(W*D*H)(mm)	720*830*1870	Access port QTY/Dia.	2/25MM
NT/GT (KG)	138/178	Packing size(W*D*H)(mm)	780*920*1990		

Anhui Zhongke Duling Commercial Appliance Co.,Ltd No. 1 Hexianghu RD,changfeng,hefei, Anhui, China

