



FEATURERS



Imported brand compressors

Double cooling system, double chamber



Fast pull down

Rapid cooling from +25°C to -25°C



Coil evaporator

Better performance, easy maintenance




USB interface

10-year data for downloading



Lockable doors

Standard locks & padlocks

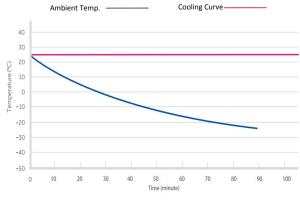

MDF-25V528 Pull down at ambient temp. 25°C



Large LED displays

Easy to observe and operate, built-in USB



Precise temp. control

Temp. control accurate to 0.1°C



6 types of alarm

Audible and visual alarms




Variable space

Adjustable shelves and drawers




Eco-friendly

CFC-free refrigerant and energy-saving





STRUCTURE

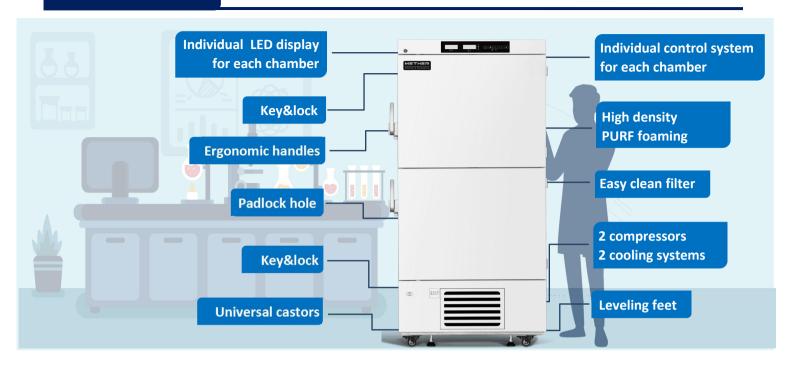



PARAMETER

Performance		Refrigeration System		Alarms	
Cooling method	Direct cooling	Compressor brand/QTY	CUBIGEL/2	High/low temperature	Υ
Defrost	Manual	Condenser	Coppertube	Power failure	Υ
Refrigerant	R290	Temp. controller	Microprocessor	Sensor error	Υ
Temperature range	-10°C~-25°C	Sensor	NTC	Controller failure	Y
Ambient temperature	10~32℃	Display	Digital display	Door ajar	Y

Electrical Data Voltage frequency(V/Hz) 220/50Hz		Dimensions		Other	
		Capacity (L/cu.ft)	528/18.64	USB port	Υ
Power (W)	340W	Exterior size (W*D*H) (mm) 921*960*1875		Remote alarm port	Y
Current (A)	3.4 A	Interior size(W*D*H)(mm) (651*631.5*635)*2		Access port QTY/Dia.	2/25MM

