
-40 ℃ Biomedical Freezer





FEATURERS

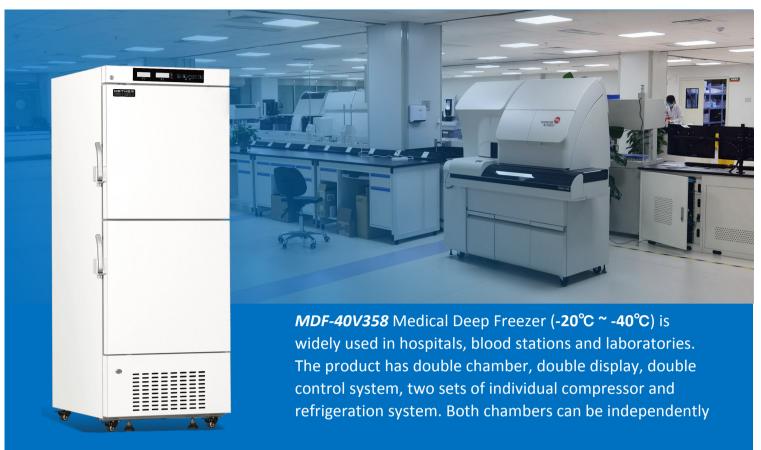

Imported brand

Double cooling system, double chamber



Fast pull down

Rapid cooling from +25°C to -40°C



Coil evaporator

Better performance, easy maintenance




USB interface

10-year data for downloading



Lockable doors

Standard locks & padlocks



MDF-40V358 Pull down at ambient temp. 25°C



Large LED displays

Easy to observe and operate, built-in USB



Precise temp. control

Temp. control accurate to 0.1°C



6 types of alarm

Audible and visual alarms




Variable space


Adjustable shelves and drawers




Eco-friendly

CFC-free refrigerant and energy-saving





STRUCTURE

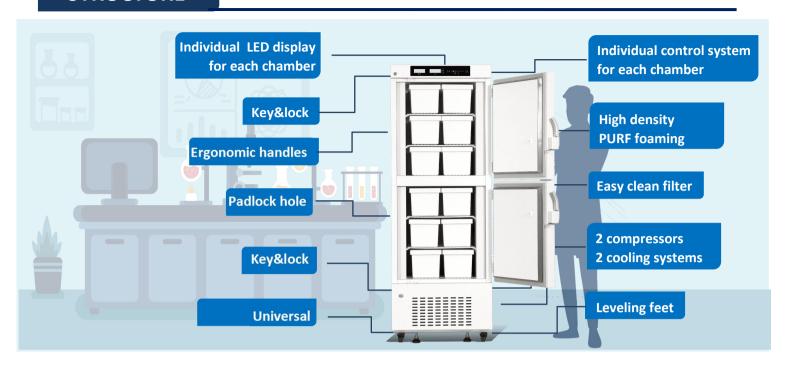



PARAMETER

Performance		Refrigeration System		Alarms	
Cooling method	Direct cooling	Compressor brand/QTY	CUBIGEL/2	High/low temperature	Y
Defrost	Manual	Condenser	Coppertube	Power failure	Υ
Refrigerant	R290	Temp. controller	Microprocessor	Sensor error	Υ
Temperature range	-20°C~-40°C	Sensor	NTC	Controller failure	Y
Ambient temperature	10~32°℃	Display	Digital display	Door a jar	Y

Electrical Data		Dimensions		Other	
Voltage frequency(220V 50Hz/110V 60HZ	Capacity (L/cu.ft)	358/12.6	USB port	Y
Power (W)	345W	Interior size (W*D*H) (mm)	(651*631.5*635)*2	Remote alarm port	Υ
Current (A)	3.2 A	Exterior	900*818*1875	Access port QTY/Dia.	2/25M
NT/GT (KG)	138/178	Packing size (W*D*H)(mm)	921*960*1875		

